

Flood Pump Kit

Easy to operate, the Flood Pump Kit will remove flood water from your property with speed and efficiency. The pump can operate within the filter tank for extra protection or independently as required.

- Fully automatic
- Discharges up to 10m³/h
- Simple to use
- Robust & reliable
- Minimum depth 40mm (on manual)



SUBMERSIBLE PUMP (FULLY AUTOMATIC)




DISCHARGE PIPEWORK, 20m



FILTER TANK WITH LID

PUMP PERFORMANCE

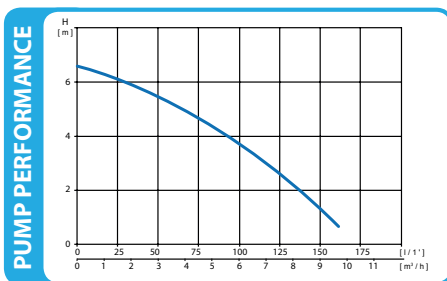

TECHNICAL SPECIFICATIONS

Power output	340W
Voltage	230V / 50Hz
Current	1.5A
Max. temp water (normal)	35°C
Max. temp water (intermittent)	70°C
Min. depth (on manual)	40mm
Min. depth (on automatic)	110mm
Pump head	7m
Discharge	1¼"
Cable length	10m
Dimensions tank (L/W/H)	600 x 400 x 420mm
Weight	7kg

